

Technical data sheet for

## E32D4 ON THE P8M Prover/Holding Cabinet Full Size Digital / Electric Convection Oven on a 8 Tray Manual / Electric Prover/Holding Cabinet



E32D4 OVEN



### E32D4

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable moisture injection, 2 speed oven fan, and 3 stage cooking. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

### P8M

Unit shall be a Moffat electrically heated Turbofan Prover and Holding Cabinet. The prover and holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged and field reversible. Unit shall have capacity for up to 16 half size sheet pans or 8 full size sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a mechanical thermostat and humidity via a control of the water tank. A thermometer shall indicate the cabinet temperature. Prover and holding cabinet shall be mounted on castors, with two rigid castors at rear and two swivel castors dual swivel and wheel lock and front. Prover and Holding Cabinets shall be fitted with 10A plug-in cordsets. Unit shall be supplied in 100% recyclable shipping packaging.

### STANDARD FEATURES

- 4 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 8 400mm x 600mm tray capacity (optional kit for P8M)
- 4 tray Oven / 8 tray Prover
- Compact 735mm width
- Low unit height 1560mm
- Side hinged doors (standard LH hinge)  
Optional RH hinge (field convertible)
- Dual halogen lamps in Oven and Prover
- Prover with dual function Prove and Holding modes

### OVEN

- 110mm tray spacing
- Electronic digital display Time and Temperature controls
- Manual mode and Program mode
- 20 programs with 3 stage cooking and stage end alarms
- Core Probe program cooking (optional Core Probe Kit)
- Moisture injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- Safe-Touch vented door
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- 4 oven wire racks supplied
- 100% recyclable packaging

### PROVER

- 76mm tray spacing
- Auto water fill system with optional integrated water filter kit
- Continuous door seal
- Low velocity circulation fan system
- Mechanical thermostat and humidity level control
- Cabinet temperature display thermometer
- 4 dia. 76mm castors with 2 front castors dual wheel and swivel lock, 2 rigid rear castors
- 100% recyclable packaging

### ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- 600mm x 400mm tray racking kit for P8M
- Optional 3M Cuno water filter kit complete with cartridge and connection fittings
- Installs in pre-fitted rear housing of cabinet for flush rear installation

### E32D4 Full Size Digital / Electric Convection Oven

### P8M Full Size Manual / Electric Prover/Holding Cabinet

#### CONSTRUCTION - OVEN (E32D4)

Vitreous enamel fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel frame side hinged door  
5mm thick door inner and outer glass  
Stainless steel control panel  
Aluminised coated steel base and rear panels

#### CONSTRUCTION - PROVER (P8M)

304 stainless steel interior cabinet  
Stainless steel front, sides and top exterior  
Stainless steel interior side racks  
Stainless steel frame side hinged door  
5mm thick door glass  
Stainless steel control panel  
Aluminised coated steel base and rear panels

#### CONTROLS - OVEN (E32D4)

Electronic controls with digital time and temperature display,  
Manual or Program modes  
Large 20mm high LED displays  
Two individual time and temperature setting control knobs  
ON/OFF and Oven Lights key  
Fan LO speed key  
Timer Start/Stop key  
Moisture injection key (5 levels)  
Programs select key  
Actual temperature display key  
Adjustable buzzer/alarm volume  
Thermostat range 50-260°C  
Timer range from 180 minutes in countdown mode  
Timer range up to 999 minutes in time count mode for holding, slow cooking  
Optional Core Probe temperature range 50-90°C  
Over-temperature safety cut-out

#### CONTROLS - PROVER (P8M)

Off / Prove / Holding mode selector switch  
Mechanical thermostat 20-85°C  
Humidity level control  
Cabinet temperature thermometer  
Auto-fill water system standard

#### CLEANING

Stainless steel top and side exterior panels  
Vitreous enamel oven chamber  
Fully removable stainless steel oven and prover side racks  
Removable stainless steel oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)

#### SPECIFICATIONS

Electrical Requirements  
Oven (E32D4)  
230-240V, 50Hz, 1P+N+E, 6.5kW, 27A  
No cordset supplied  
Prover (P8M)  
230-240V, 50Hz, 1P+N+E, 1.5kW, 6.3A  
10A cordset fitted

#### Water Requirements

Cold water connection 3/4" BSP male  
80psi maximum inlet pressure / 20psi minimum inlet pressure  
Connection to oven optional

#### External Dimensions

Width 735mm  
Height 1560mm  
Depth 810mm

#### Nett Weight

Oven (E32D4)  
89kg

#### Prover (P8M)

77.5kg

#### Packing Data

##### Oven (E32D4)

105kg  
0.57m<sup>3</sup>  
Width 760mm  
Height 815mm  
Depth 925mm

##### Prover (P8M)

95.3kg  
0.76m<sup>3</sup>  
Width 760mm  
Height 1080mm  
Depth 925mm

#### INSTALLATION CLEARANCES

Rear 50mm  
LH Side 50mm  
RH Side\* 75mm  
\* For fixed installations a minimum of 500mm is required for service

#### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



Australia  
www.moffat.com.au  
New Zealand  
www.moffat.co.nz  
www.turbofanoven.com

#### Australia Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9202 6820  
bgarcia@moffat.com.au

#### New Zealand Moffat Limited

Christchurch  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz


Auckland  
Telephone 09-574 3150  
sales@moffat.co.nz



Designed and manufactured by  
**MOFFAT**

ISO9001  
All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

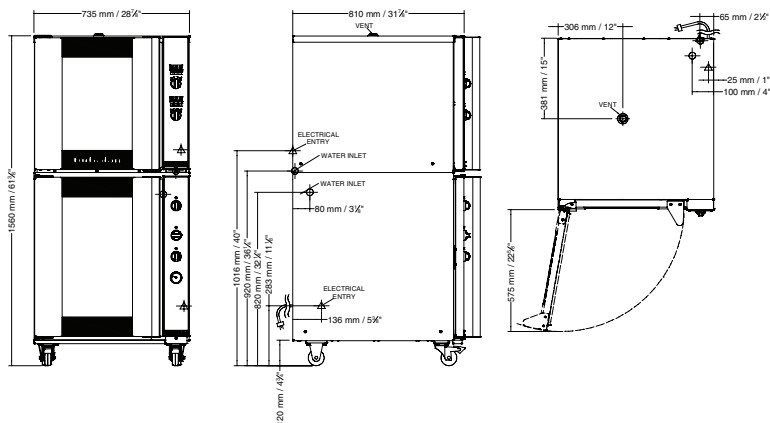

E32D4 OVEN

