

Specification

CombiMaster® Plus XS 6 2/3/XS 6 2/3 E (12 x 2/3 GN)

Reference number:



Description

- 2 individual units (Combi-Steamer Mode) for most cooking methods, with optional use of steam and hot-air, separately, sequentially or combined.

Working safety

- Cleaning and rinse aid tabs (solids) for maximum operational safety
- HACCP data output and software update via integral USB port
- Safety temperature limiter for steam generator and hot-air heating
- Maximum rack height 5 1/4 ft. / 1.60 m when original stand used
- Integral fan impeller brake
- Door handle with right/left and slam function

Operation

- Mode selector control for cooking modes, separate controls for temperature, core temperature and time settings
- LED illuminated display, visible from a distance
- Clear control panel

Cleaning, care and operational safety

- 3 automatic cleaning programs
- Diagnostic system with automatic service notices displayed
- Menu-guided user descaling program

Features

- Rear-ventilated triple-glazed cooking cabinet door, two hinged inside panes (for easy cleaning) with a special heat-reflecting coating
- Unit base with surrounding seal
- Removable, swivel hinging rack with flexible rack options on 11 levels
- LED cooking cabinet lighting - energy-saving, durable and low-maintenance
- USB port
- Probe for core temperature measurement
- Individual programming of 100 cooking programs each with up to 6 steps
- 5 fan air speeds, programmable
- Integral, maintenance-free grease extraction system with no additional grease filter
- Cool-down function for fast cabinet fan cooling
- High-performance fresh steam generator
- Automatic, active rinsing and drainage of steam generator by pump
- Automatic adaptation to the installation location (height, climate, etc.)
- Seamless hygienic cooking cabinet with rounded corners, cabinet with splash guard - stops water from spilling out
- Material inside and out 304 (DIN 1.4301) stainless steel
- Hand shower with automatic retracting system
- Fixed waste water connection conforming to SVGW requirements where permitted
- Splash and hose-proof to IPX 5
- Temperature unit is selectable in °C or °F
- Dynamic air mixing

ClimaPlus



Climate management - humidity measurement, 5-stage setting and regulation

Combi-Steamer mode



Steam between 30 °C and 130 °C



Hot-air from 30 °C-300 °C



Combination of steam and hot-air
30 °C-300 °C

Approval/Labels



Planner/Designer:



Specification/Data sheet

Wed Jun 07 10:14:57 CEST 2017

CombiMaster® Plus XS 6 2/3/XS 6 2/3 E (12 x 2/3 GN)

Technical Info

Lengthwise loading for: 2/3, 1/2, 1/3 GN
Capacity (GN-container/ grids): 12 x 2/3 GN
Number of meals per day: 40-160
Width: 655 mm
Depth: 555 mm
Height: 1152 mm
Weight (net): 124 kg

Weight (gross): 164 kg
Water connection (pressure hose): 3/4" / d 1/2"
Water pressure (flow pressure): 150-600 kPa / 0,15-0,6 Mpa / 1,5 - 6 bar
Water drain: DN 40 mm
Connected load electric (top/bottom): 5,7 kW / 5,7 kW

"Steam" connection (top/ bottom): 5,4 kW / 5,4 kW
"Hot-air" connection (top/bottom): 5,4 kW / 5,4 kW

Mains connection	Breaker Size / (amp draw)	Cable crossection
3 NAC 400V 50/60Hz	2 x 3x10A	2 x 5x1,5mm ²

Other voltage on request!

Installation

- Attention: Copper wiring only!
- Recommended left hand clearance for service and maintenance 20" / 500 mm. It must be a minimum of 14" / 350 mm if heat sources are affecting the left side of the unit
- Installations must comply with all local electrical, plumbing and ventilation codes


Options

- Interface Ethernet
- Safety door lock
- external signal unit connection

Accessories

- UltraVent XS condensation hood
- GN Containers, Trays, Grids

CombiMaster® Plus XS 6 2/3/XS 6 2/3 E (12 x 2/3 GN)

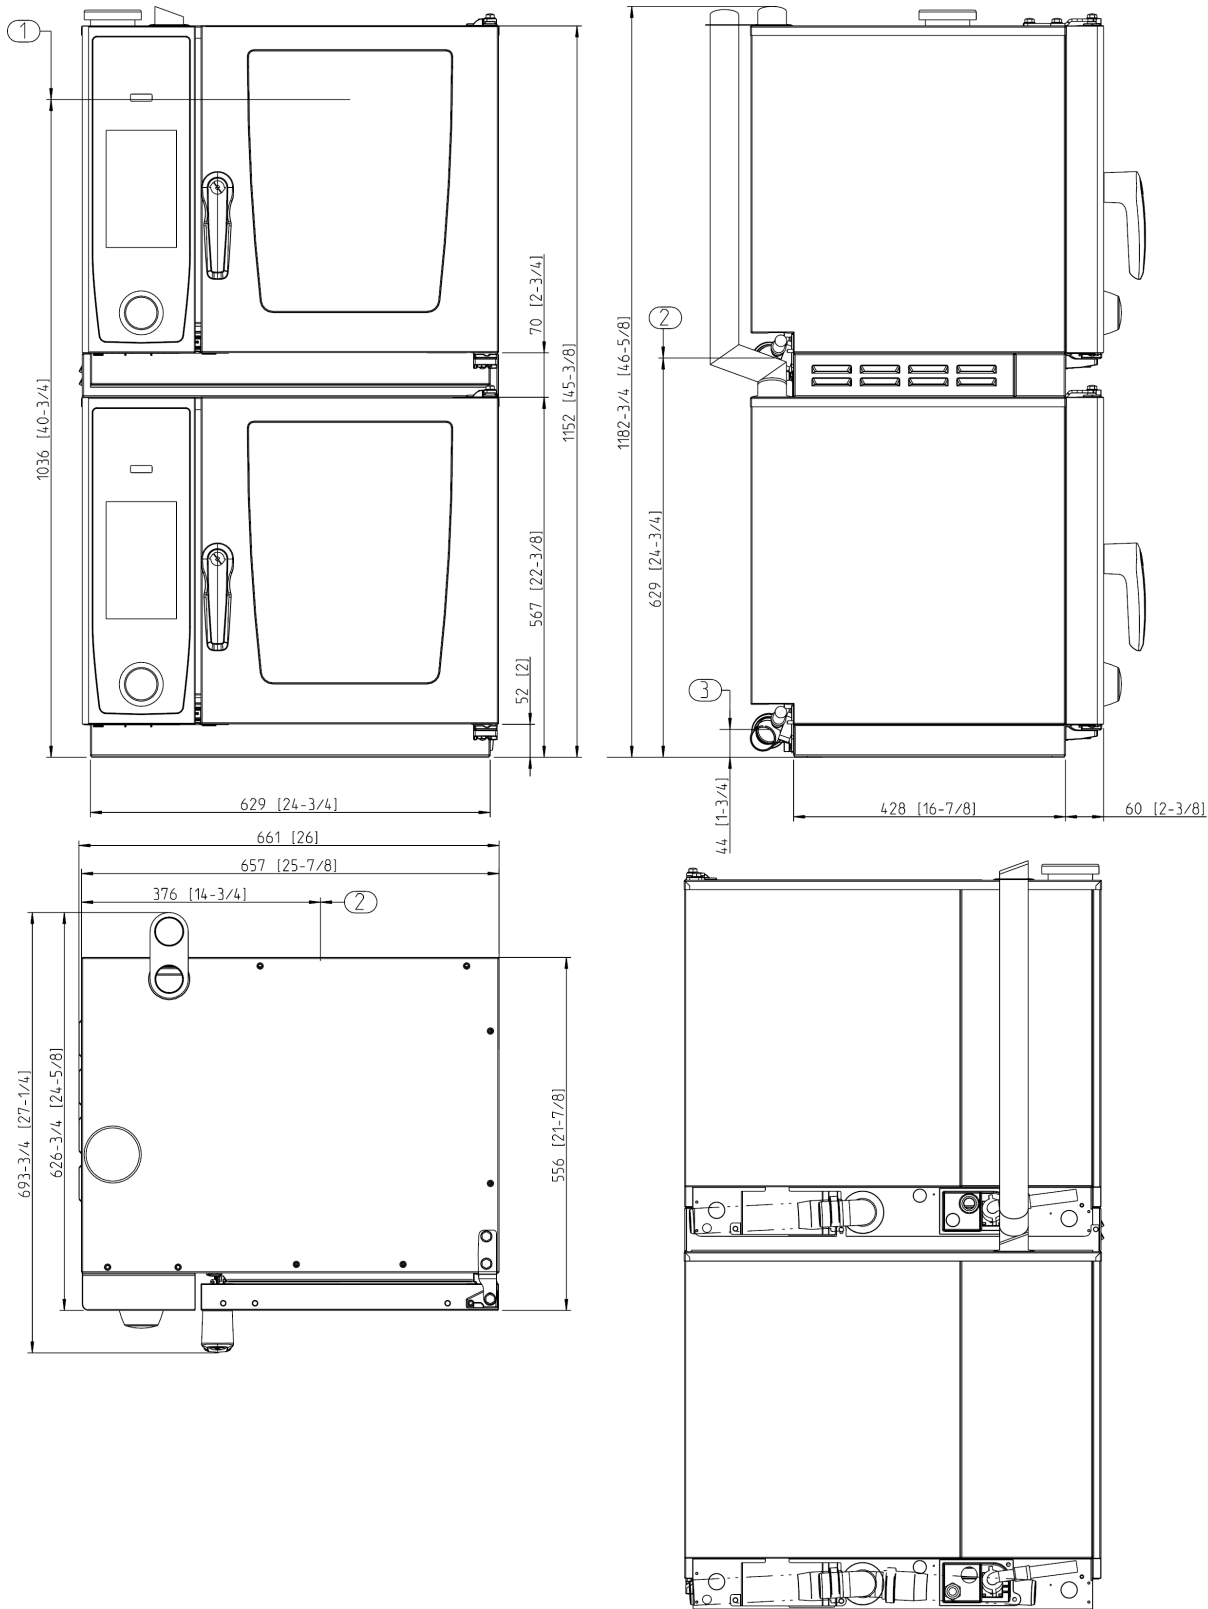

1. upper rack 2. Water drain top 3. Water drain bottom