

Self Contained Ice Machine up to 85 kg



Features

- Produces Medium cubes or Small cubes.
- Resistant stainless steel exterior.
- Front panel in & out airflow for built-in installation.
- It is suitable for under-counter installation with 770 mm in height.
- High grade appearance.
- Easily accessible front panel mount ON-OFF Switch.
- Ergonomically designed ice-storage access, with disappearing door.
- Routine Maintenance visible alarm light on front panel.
- It is easy for water system cleaning with One Touch cleaning button. (The SCOTSMAN cleaner is sold separately)
- Front access condenser air filter, removable and washable.
- CFC-free R-40A refrigerant.




Proximity condenser air filter



Front ON-OFF Switch
Routine Maintenance Alarm



Hygienic scoop holder
Easy bin access



Advanced PC board with
one touch cleaning and
indicator lights

NU 150 Technologies



Model	Cooling System	24h Production				Storage capacity		Dimensions [WxDxH mm] 600x610x770
		21°C : 10°C		32°C : 21°C		[kg]	[lb]	
NU 150AS	Air cooled	68	150	48	106	20	44	[WxDxH inches] 23" x 24" x 30"
NUH 150AS	Air cooled	68	150	48	106	20	44	
NU 150WS	Water cooled	n/a	n/a	n/a	n/a	n/a	n/a	[V/Hz/ph] 220/50/1
NUH 150WS	Water cooled	n/a	n/a	n/a	n/a	n/a	n/a	

MEDIUM CUBE
10g



22×22×22mm

SMALL CUBE
5g




9,5×22×22 mm

This product qualifies for the following listings:



Self Contained Ice Machine up to 85 kg

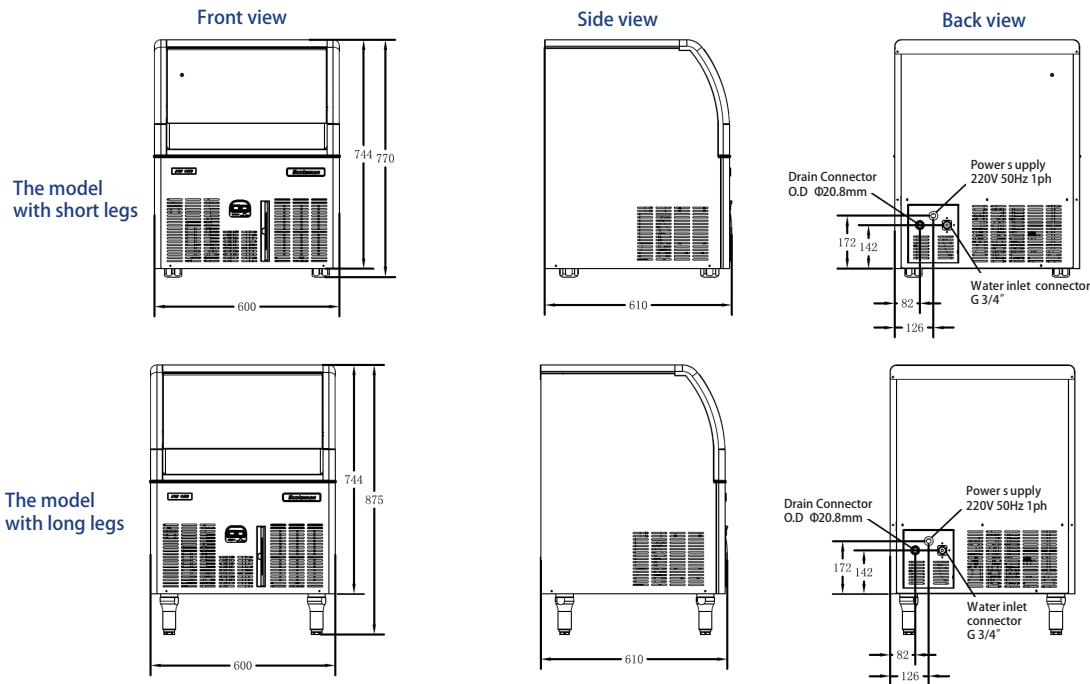

NU 220 Air cooled



Inlet water temperature

Air temperature °C / °F	Inlet water temperature				kg	lb
	50° 10°	60° 15°	70° 21°	90° 32°		
10°	85	--	--	--	kg	lb
50°	187	--	--	--	kg	lb
21°	68	--	--	--	kg	lb
70°	150	--	--	--	kg	lb
32°	--	--	48	--	kg	lb
90°	--	--	106	--	kg	lb
38°	--	--	44	42	kg	lb
100°	--	--	97	92	kg	lb



Air temperature



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 kg	Water [L] - 100 kg	Weight [kg] [lb]
NU 150 AS	Air Cooled	3380 990	1,5	500	10A	18,7	165	50 111
NUH 150 AS	Air Cooled	3380 990	1,5	500	10A	18,7	165	50 111
NU 150 WS	Water Cooled	n/a n/a	n/a	n/a	n/a	n/a	n/a	n/a n/a
NUH 150 WS	Water Cooled	n/a n/a	n/a	n/a	n/a	n/a	n/a	n/a n/a

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-china.com