

Self Contained Ice Machine up to 109 kg




Proximity condenser air filter



Front ON-OFF Switch
Routine Maintenance Alarm



Hygienic scoop holder
Easy bin access



Advanced PC board with
One touch cleaning and
indicator lights

Features

- Produces Medium cubes or Small cubes.
- Resistant stainless steel exterior.
- Front panel in & out airflow for built-in installation.
- It is suitable for under-counter installation with 870 mm in height.
- High grade appearance.
- Easily accessible front panel mount ON-OFF Switch.
- Ergonomically designed ice-storage access, with disappearing door.
- Routine Maintenance visible alarm light on front panel.
- It is easy for water system cleaning with One Touch cleaning button. (The SCOTSMAN cleaner is sold separately)
- Front access condenser air filter, removable and washable.
- CFC- free R-404A refrigerant.

NU 220 Technologies



Model	Cooling System	24h Production				Storage capacity		Dimensions [WxDxH mm] 650x690x870
		21°C : 10°C	32°C : 21°C	[kg]	[lb]	[kg]	[lb]	
NU 220 AS	Air cooled	100	220	70	154	37	81	[WxDxH inches] 26" x 27" x 34"
NUH 220 AS	Air cooled	100	220	70	154	37	81	
NU 220 WS	Water cooled	n/a	n/a	n/a	n/a	n/a	n/a	 [V/Hz/ph] 220/50/1 R 404A
NUH 220 WS	Water cooled	n/a	n/a	n/a	n/a	n/a	n/a	

MEDIUM CUBE
10g



22×22×22mm

SMALL CUBE
5g




9,5×22×22 mm

This product qualifies for the following listings:



Self Contained Ice Machine up to 109 kg

The model with short legs

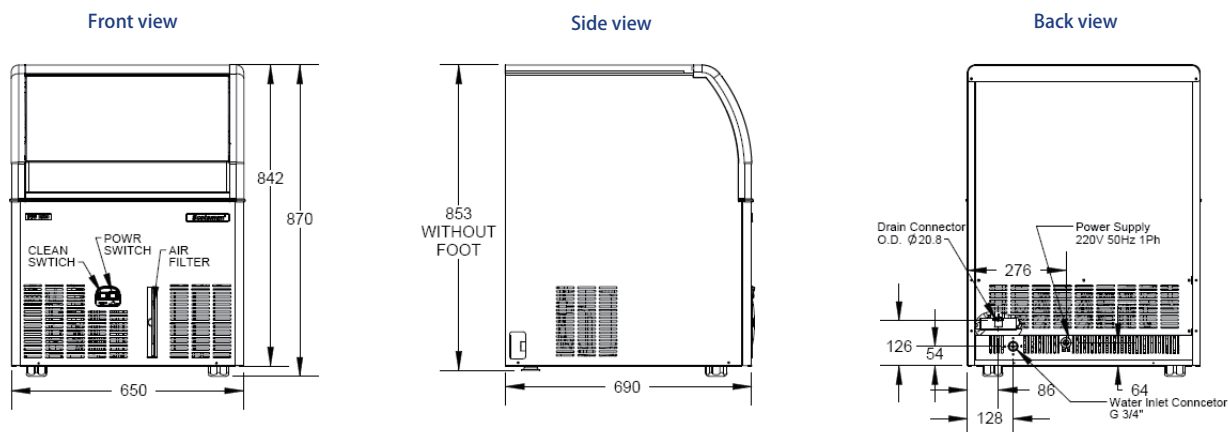

NU 220 Air cooled



Inlet water temperature

Air temperature °C / °F	Inlet water temperature				
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	109	--	--	--	kg
50°	240	--	--	--	lb
21°	100	--	--	--	kg
70°	220	--	--	--	lb
32°	--	--	70	--	kg
90°	--	--	154	--	lb
38°	--	--	61	59	kg
100	--	--	134	130	lb



Air temperature



24h

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

Model	Compressor	Capacity [Btu/h] [W]	Water Inlet [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 kg	Water [L] - 100 kg	Weight [kg] [lb]
NU 220 AS		6140 1800	1,5	600	10A	18,7	159	65 143
NUH 220 AS		6140 1800	1,5	600	10A	18,7	159	65 143
NU 220 WS		n/a n/a	n/a	n/a	n/a	n/a	n/a	n/a n/a
NUH 220 WS		n/a n/a	n/a	n/a	n/a	n/a	n/a	n/a n/a

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-china.com